


Neets Control – USB Switch

Switches Between Computers Used with Interactive Board

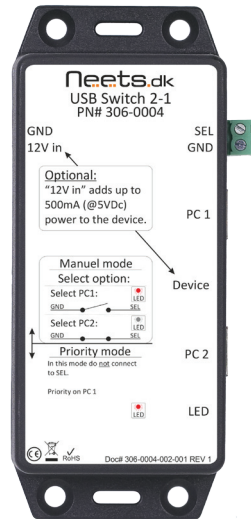

HIGHLIGHTS


- **Switches between two devices**
Allows easy switching between a fixed main computer and a laptop.
- **Supports USB 2.0 standard**
- **Manual or priority modes**
Use external button for switching computers, or allow automatic priority switching when second computer is connected.
- **No software installation required**
Switch responds to external command or data signal presence.
- **Can be mounted in trunking system**
- **User friendly**
Simply press a button or connect and start second computer.

THE PERFECT COMPLEMENT TO INTERACTIVE WHITEBOARD INSTALLATIONS

Interactive whiteboards are now commonly used in school classrooms and corporate boardrooms, and normally the whiteboards are connected via USB to a permanently installed main computer. However, when an instructor or visiting speaker wishes to use his or her own laptop computer, connecting to the interactive board can be troublesome.

The Neets – USB Switch solves the problem. It offers convenient switching between the two computers, connecting either computer to the interactive board as required. No software installation is required, as the system responds to either a contact closure in manual mode or the presence of a new USB connection in priority mode.

The Neets USB-Switch is easily mounted in a trunking system, with the unit's dimensions making it an easy fit inside and mounting flanges on both ends for securing. Installation is fast and easy, using standard USB connectors and plug-in Euroblock connectors.

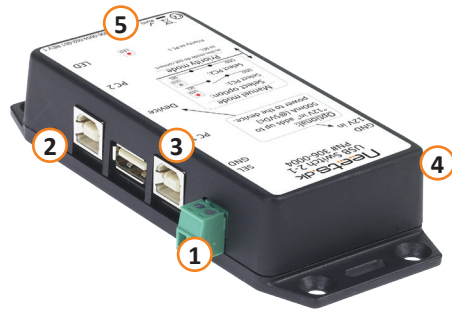

FEATURES

NEETS CONTROL - USB SWITCH
ITEM NO: 306 – 0004

CONNECTIONS KEY

- ① 12 V auxiliary power input
- ② USB for computer 1
- ③ USB for computer 2
- ④ External switch connector for manual mode
- ⑤ Switch selects manual or auto priority mode

TECHNICAL SPECIFICATIONS

USB CONNECTORS:

2 x USB “B” standard (to computers)
1 x USB “A” standard (to device)

USB STANDARD:

Supports USB 2.0

AUXILIARY POWER INPUT:

12 VDC
Supplies 5 VDC @ 350 mA to device

EXTERNAL CONNECTOR FOR MANUAL MODE:

Switches device to PC 2 USB with contact closure

MANUAL/PRIORITY SWITCH:

Switches between manual (external contact closure) and auto priority (USB PC 2 connected)

DIMENSIONS:

Width: 25 mm
Height: 125 mm
Depth: 70 mm

WEIGHT:

90 g

